


Part Number	λ_P (nm)	Vcc(V)	Data Rate (Mbps)	Propagation Delay Time		Dissipation Current(mA)		Fiber Coupling Light Output (dBm)	Pulse Width Distortion Δtw (ns)
				tPLH(ns) Max.	tPHL(ns) Max.	Typ.	Max.		
DLT1160	650	5	13.2	100	100	5.5	10	-21~-15	± 25
DLR1160	650	4.75~5.25	16	100	100	6	10	-24~-14.5	± 20



Dimensions

Unit:mm

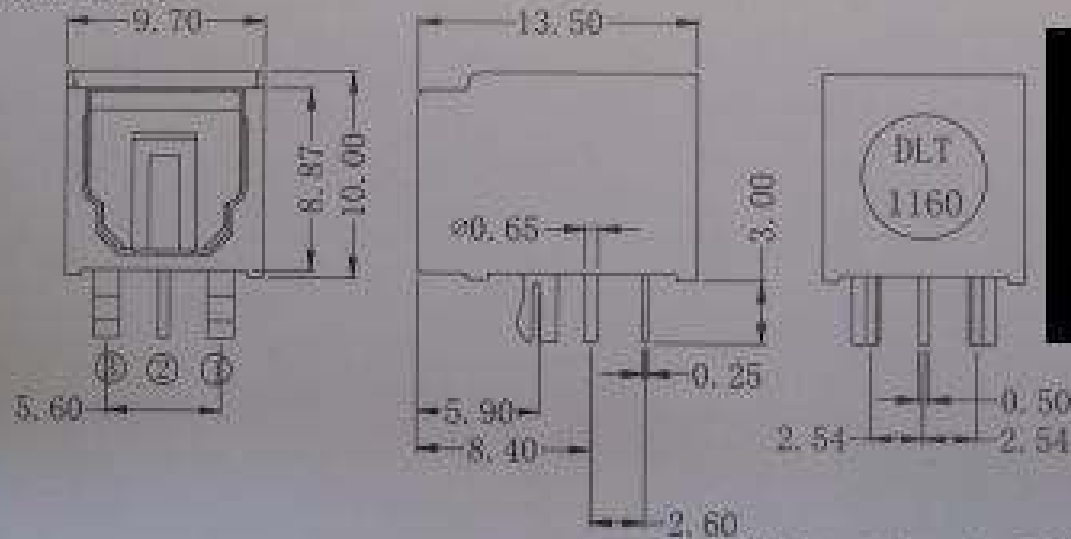

PIN Function 1. GND 2. Vcc 3. Vin