


# MC1468 MC1568

## DUAL $\pm 15$ -VOLT REGULATOR

The MC1568/MC1468 is a dual polarity tracking regulator designed to provide balanced positive and negative output voltages at currents to 100 mA. Internally, the device is set for  $\pm 15$ -volt outputs but an external adjustment can be used to change both outputs simultaneously from 8.0 to 20 volts. Input voltages up to  $\pm 30$  volts can be used and there is provision for adjustable current limiting. The device is available in three package types to accommodate various power requirements.

- Internally set to  $\pm 15$  V Tracking Outputs
- Output Currents to 100 mA
- Outputs Balanced to within 1% (MC1568)
- Line and Load Regulation of 0.06%
- 1% Maximum Output Variation due to Temperature Changes
- Standby Current Drain of 3.0 mA
- Externally Adjustable Current Limit
- Remote Sensing Provisions
- Case is at Ground Potential (R suffix package)

## CIRCUIT SCHEMATIC


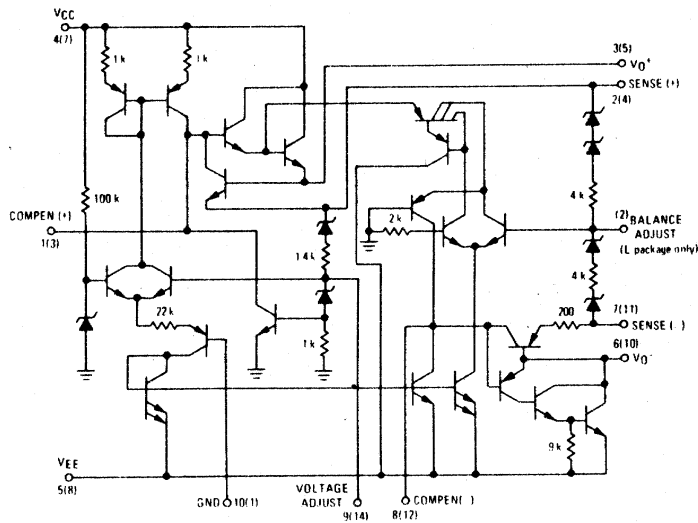


Pin numbers adjacent to terminals are for the G and R suffix packages only. Pin numbers in parentheses are for the L suffix package only.



Pin 10 is ground for the G suffix package only. For the R package, the case is ground.

## DUAL $\pm 15$ -VOLT TRACKING REGULATOR

### SILICON MONOLITHIC INTEGRATED CIRCUIT





CASE 603C  
METAL PACKAGE  
TO-100  
G SUFFIX



CASE 614  
METAL PACKAGE  
R SUFFIX

CASE 632  
CERAMIC PACKAGE  
TO-116  
L SUFFIX



## ORDERING INFORMATION

DEVICE	TEMPERATURE RANGE	PACKAGE
MC1468G	0° C to +70° C	Metal Can
MC1468L	0° C to +70° C	Ceramic DIP
MC1468R	0° C to +70° C	Metal Power
MC1568G	-55° C to +125° C	Metal Can
MC1568L	-55° C to +125° C	Ceramic DIP
MC1568R	-55° C to +125° C	Metal Power

# MC1468, MC1568

## MAXIMUM RATINGS (T<sub>C</sub> = +25°C unless otherwise noted.)

Rating	Symbol	Value			Unit
Input Voltage	V <sub>CC</sub> ,  V <sub>EE</sub>	30			Vdc
Peak Load Current	I <sub>PK</sub>	100			mA
Power Dissipation and Thermal Characteristics T <sub>A</sub> = +25°C Derate above T <sub>A</sub> = +25°C Thermal Resistance, Junction to Air T <sub>C</sub> = +25°C Derate above T <sub>C</sub> = +25°C Thermal Resistance, Junction to Case	P <sub>D</sub>	G Package	R Package	L Package	Watts
		0.8	2.4	1.0	
	1/θ <sub>JA</sub>	6.6	28.5	10	mW/°C
	θ <sub>JA</sub>	150	35	100	°C/W
	P <sub>D</sub>	2.1	9.0	2.5	Watts
	1/θ <sub>JC</sub>	14	61	20	mW/°C
θ <sub>JC</sub>	70	17	50	°C/W	
Storage Junction Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-65 to +175			°C
Minimum Short-Circuit Resistance	R <sub>SC</sub> (min)	4.0			Ohms

## OPERATING TEMPERATURE RANGE

Ambient Temperature	MC1468 MC1568	T <sub>A</sub>	0 to +70 -55 to +125	°C

## ELECTRICAL CHARACTERISTICS (V<sub>CC</sub> = +20 V, V<sub>EE</sub> = -20 V, C<sub>1</sub> = C<sub>2</sub> = 1500 pF, C<sub>3</sub> = C<sub>4</sub> = 1.0 μF, R<sub>SC</sub><sup>+</sup> = R<sub>SC</sub><sup>-</sup> = 4.0 Ω, I<sub>L</sub><sup>+</sup> = I<sub>L</sub><sup>-</sup> = 0, T<sub>C</sub> = +25°C unless otherwise noted.) (See Figure 1.)

Characteristic	Symbol*	MC1568			MC1468			Unit
		Min	Typ	Max	Min	Typ	Max	
Output Voltage	V <sub>O</sub>	±14.8	±15	±15.2	±14.5	±15	±15.5	Vdc
Input Voltage	V <sub>in</sub>	-	-	±30	-	-	±30	Vdc
Input-Output Voltage Differential	V <sub>in</sub> - V <sub>O</sub>	2.0	-	-	2.0	-	-	Vdc
Output Voltage Balance	V <sub>Bal</sub>	-	±50	±150	-	±50	±300	mV
Line Regulation Voltage (V <sub>in</sub> = 18 V to 30 V) (T <sub>low</sub> <sup>①</sup> to T <sub>high</sub> <sup>②</sup> )	Reg <sub>in</sub>	-	-	10 20	-	-	10 20	mV
Load Regulation Voltage (I <sub>L</sub> = 0 to 50 mA, T <sub>J</sub> = constant) (T <sub>A</sub> = T <sub>low</sub> to T <sub>high</sub> )	Reg <sub>L</sub>	-	-	10 30	-	-	10 30	mV
Output Voltage Range L Package (See Figure 4.) R and G Packages (See Figures 2 and 13.)	V <sub>OR</sub>	±8.0 ±14.5	-	±20 ±20	±8.0 ±14.5	-	±20 ±20	Vdc
Ripple Rejection (f = 120 Hz)	RR	-	75	-	-	75	-	dB
Output Voltage Temperature Stability (T <sub>low</sub> to T <sub>high</sub> )	TS <sub>V<sub>O</sub></sub>	-	0.3	1.0	-	0.3	1.0	%
Short-Circuit Current Limit (R <sub>SC</sub> = 10 ohms)	I <sub>SC</sub>	-	60	-	-	60	-	mA
Output Noise Voltage (BW = 100 Hz - 10 kHz)	V <sub>N</sub>	-	100	-	-	100	-	μV(RMS)
Positive Standby Current (V <sub>in</sub> = +30 V)	I <sub>B</sub> <sup>+</sup>	-	2.4	4.0	-	2.4	4.0	mA
Negative Standby Current (V <sub>in</sub> = -30 V)	I <sub>B</sub> <sup>-</sup>	-	1.0	3.0	-	1.0	3.0	mA
Long-Term Stability	ΔV <sub>O</sub> /Δt	-	0.2	-	-	0.2	-	%/k Hr


① T<sub>low</sub> = 0°C for MC1468  
= -55°C for MC1568

② T<sub>high</sub> = +70°C for MC1468  
= +125°C for MC1568

# MC1468, MC1568

## TYPICAL APPLICATIONS


**FIGURE 1 – BASIC 50-mA REGULATOR**

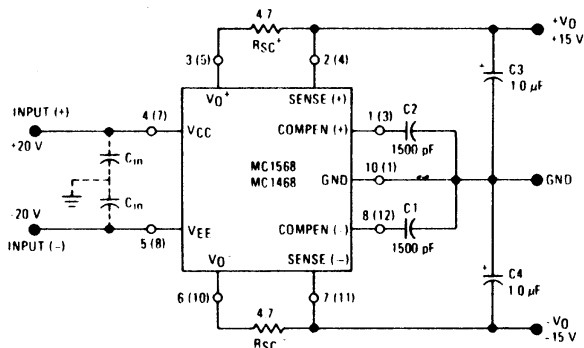

C1 and C2 should be located as close to the device as possible. A 0.1  $\mu$ F ceramic capacitor ( $C_{1n}$ ) may be required on the input lines if the device is located an appreciable distance from the rectifier filter capacitors.


C3 and C4 may be increased to improve load transient response and to reduce the output noise voltage. At low temperature operation, it may be necessary to bypass C4 with a 0.1  $\mu$ F ceramic disc capacitor.

**FIGURE 2 – VOLTAGE ADJUST AND BALANCE ADJUST CIRCUIT**  
( $14.5 \text{ V} \leq V_{out} \leq 20 \text{ V}$ )

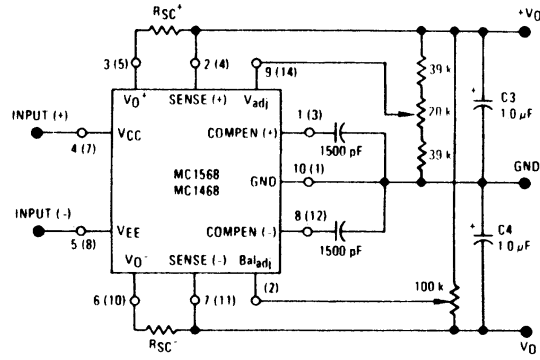


Balance adjust available in MC1568L, MC1468L ceramic dual in line package only.

**FIGURE 3 –  $\pm 1.5$ -AMPERE REGULATOR**  
(Short-Circuit Protected, with Proper Heatsinking)  
(Metal-Packaged Devices Only, R Suffix)

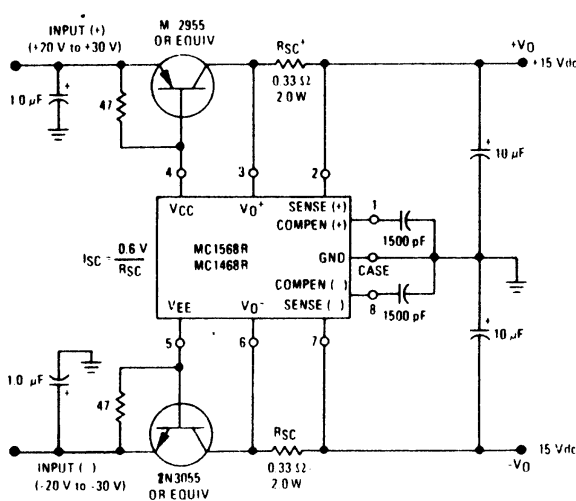

**FIGURE 4 – OUTPUT VOLTAGE ADJUSTMENT**  
FOR  $8.0 \text{ V} \leq |V_{O}| \leq 14.5 \text{ V}$   
(Ceramic-Packaged Devices Only, L Suffix.)

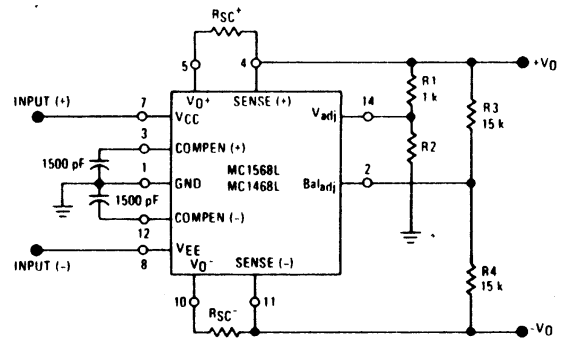

The presence of the Baladj, pin 2, on devices housed in the dual in line package (L suffix) allows the user to adjust the output voltages down to -8.0 V. The required value of resistor R2 can be calculated from

$V_{O} (\text{V})$	R2	$T_C V_{O} (\% / ^\circ\text{C})$	$I_B (\text{mA})$
14	1.2 k	0.003	10
12	1.8 k	0.022	7.2
10	3.5 k	0.025	5.0
8.0	$\infty$	0.028	2.6

$$R_2 = \frac{R_1 R_{int} (\phi + V_2)}{R_{int} (V_O - \phi - V_2) - \phi R_1}$$

Where:  $R_{int}$  - An Internal Resistor - R1 - 1 k $\Omega$ ;  
 $\phi$  - 0.68 V  
 $V_2$  - 6.6 V

Circuit diagrams utilizing Motorola products are included as a means of illustrating typical semiconductor applications; consequently, complete information sufficient for construction purposes is not necessarily given. The information has been carefully checked and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies. Furthermore, such information does not convey to the purchaser of the semiconductor devices described any license under the patent rights of Motorola Inc. or others.

# MC1468, MC1568

## TYPICAL CHARACTERISTICS

( $V_{CC} = +20\text{ V}$ ,  $V_{EE} = -20\text{ V}$ ,  $V_O = \pm 15\text{ V}$ ,  $T_A = +25^\circ\text{C}$  unless otherwise noted.)

FIGURE 5 – LOAD REGULATION

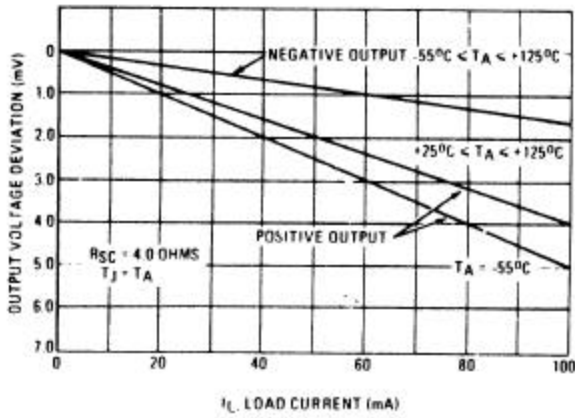


FIGURE 6 – REGULATOR DROPOUT VOLTAGE

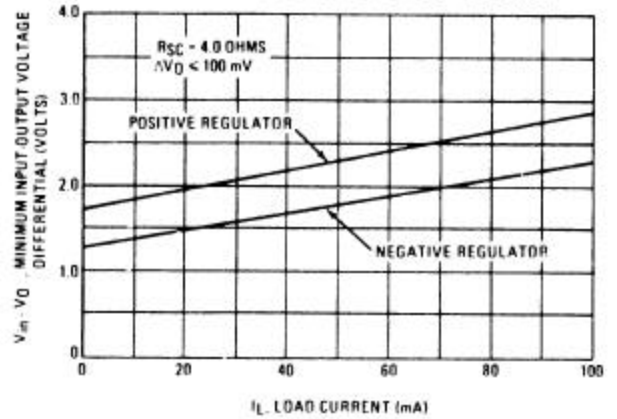


FIGURE 7 – MAXIMUM CURRENT CAPABILITY

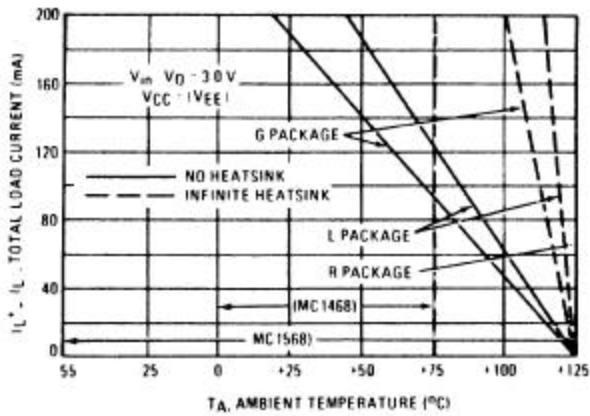


FIGURE 8 – MAXIMUM CURRENT CAPABILITY

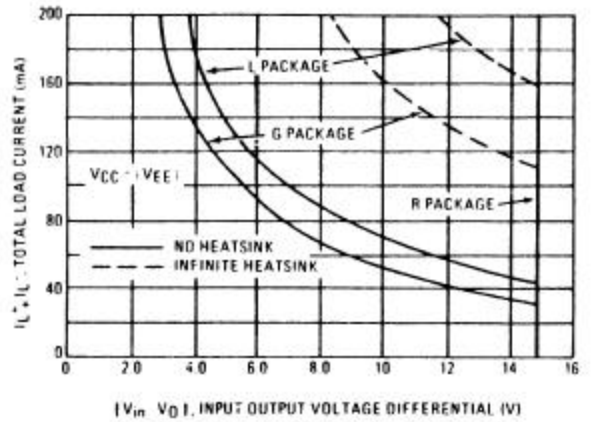


FIGURE 9 –  $I_{SC}$  versus  $R_{SC}$


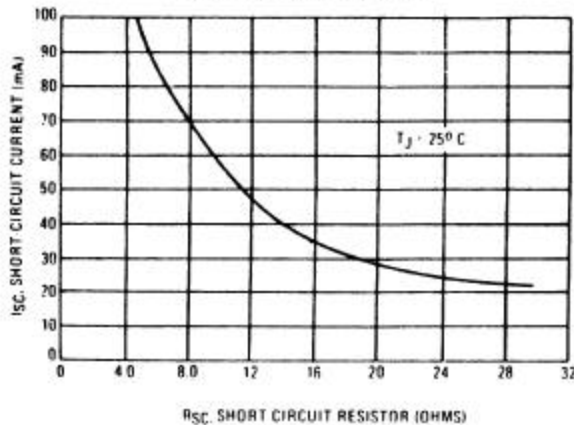



FIGURE 10 – CURRENT-LIMITING CHARACTERISTICS

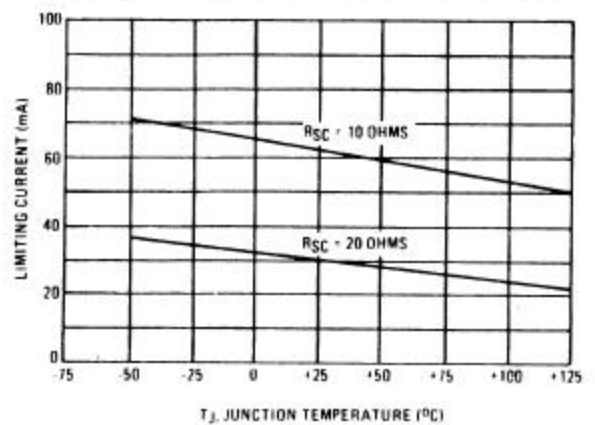


# MC1468, MC1568

**TYPICAL CHARACTERISTICS** (continued)  
 ( $V_{CC} = +20\text{ V}$ ,  $V_{EE} = -20\text{ V}$ ,  $V_O = \pm 15\text{ V}$ ,  $T_A = +25^\circ\text{C}$  unless otherwise noted.)


**FIGURE 11 – STANDBY CURRENT DRAIN**

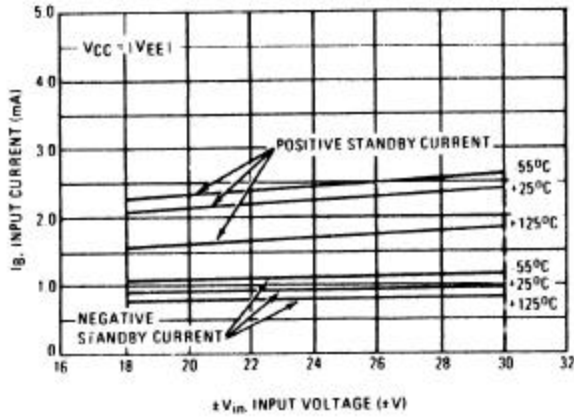


**FIGURE 12 – STANDBY CURRENT DRAIN**

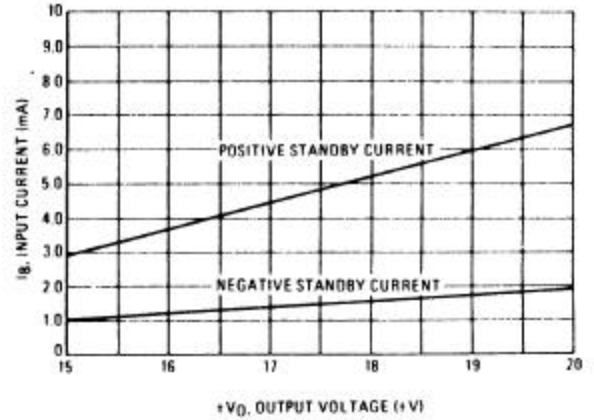


**FIGURE 13 – TEMPERATURE COEFFICIENT OF OUTPUT VOLTAGE**

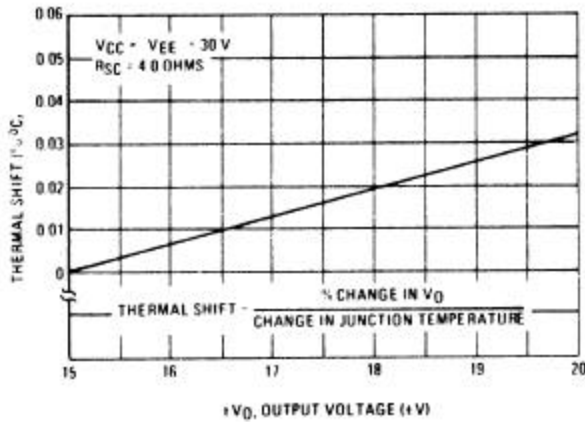


**FIGURE 14 – LOAD TRANSIENT RESPONSE**

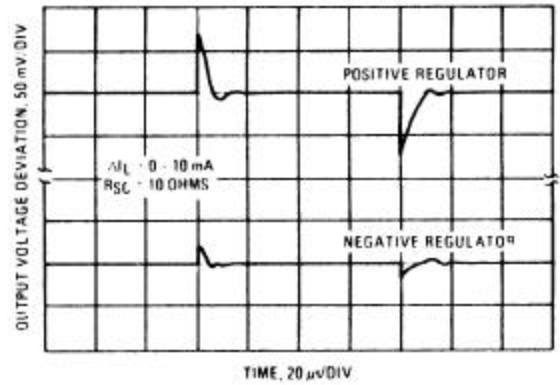

**FIGURE 15 – LINE TRANSIENT RESPONSE**

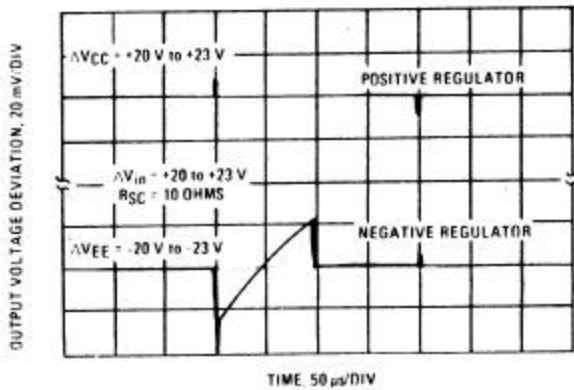

**FIGURE 16 – RIPPLE REJECTION**

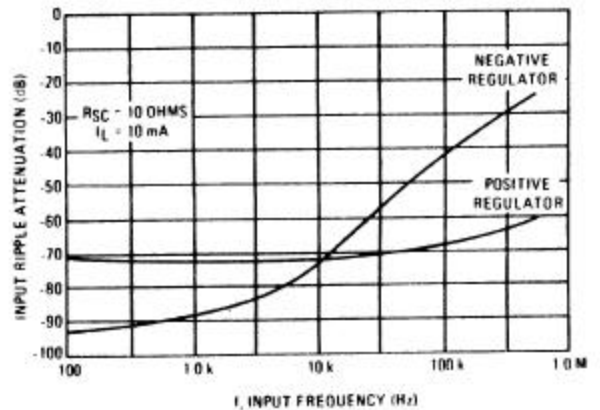


# MC1468, MC1568




## TYPICAL CHARACTERISTICS (continued)

( $V_{CC} = +20$  V,  $V_{EE} = -20$  V,  $V_O = \pm 15$  V,  $T_A = +25^\circ\text{C}$  unless otherwise noted.)

FIGURE 17 - OUTPUT IMPEDANCE

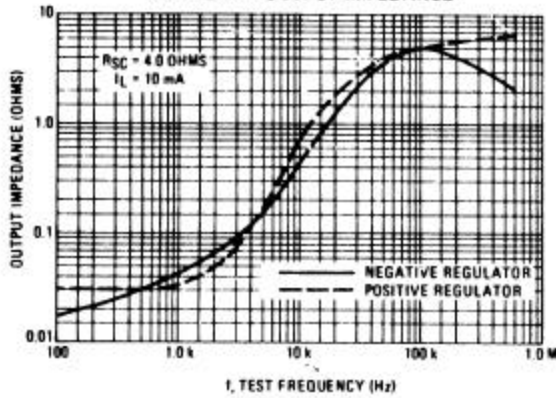

## OUTLINE DIMENSIONS

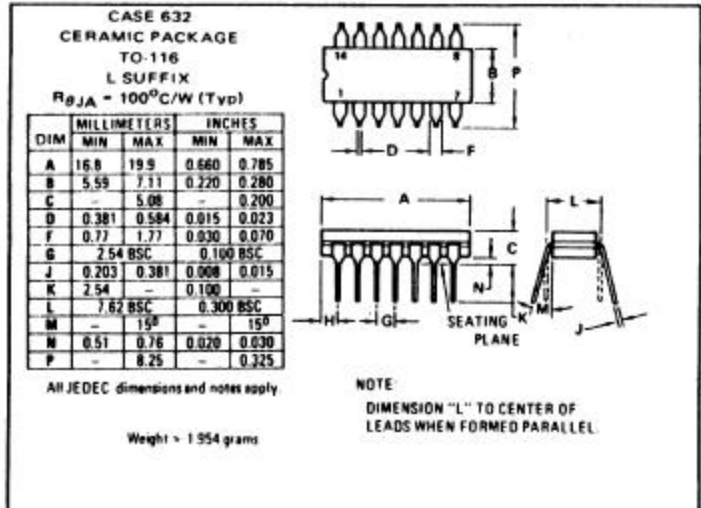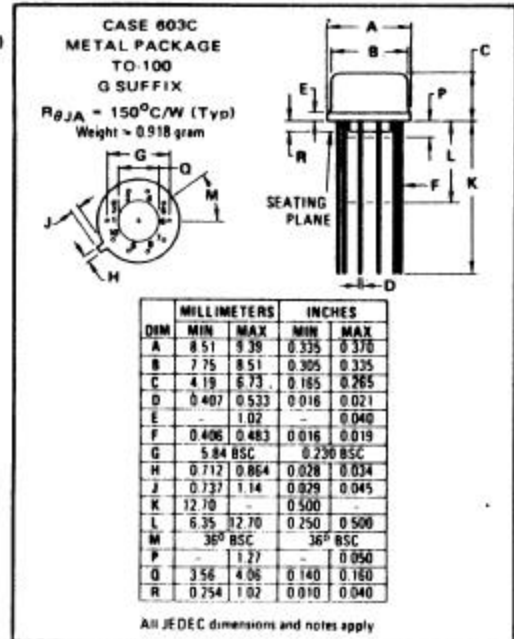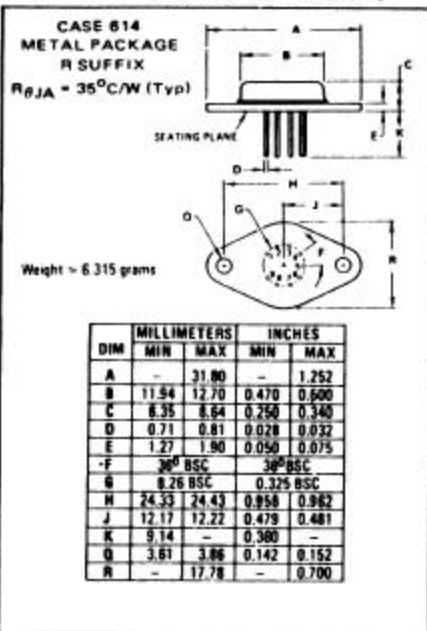

## THERMAL INFORMATION

The maximum power consumption an integrated circuit can tolerate at a given operating ambient temperature, can be found from the equation:

$$P_{D(T_A)} = \frac{T_{J(max)} - T_A}{R_{\theta JA}(Typ)} \geq V_I I_S - V_O I_O$$

Where:  $P_{D(T_A)}$  = Power Dissipation allowable at a given operating ambient temperature.

$T_{J(max)}$  = Maximum Operating Junction Temperature as listed in the Maximum Ratings Section

$T_A$  = Maximum Desired Operating Ambient Temperature

$R_{\theta JA}(Typ)$  = Typical Thermal Resistance Junction to Ambient

$I_S$  = Total Supply Current